

northerntrack

Construction Demolition & Recycling Attachments




F Series - Hydraulic Pulverizer

northerntrack

HYDRAULIC PULVERIZER

The "F" Series Hydraulic Pulverizer is most suited for secondary crushing and dismantling of low walls and floors due to its cranked "wrist" type jaw action. Bolt-on bracket mounting is standard to permit the attachment to be changed between different machines if required. A shear is incorporated in the rear of the jaws to assist in processing rebar encountered within the concrete. The F20-R offers the addition of full hydraulic rotation for more demanding demolition duties.

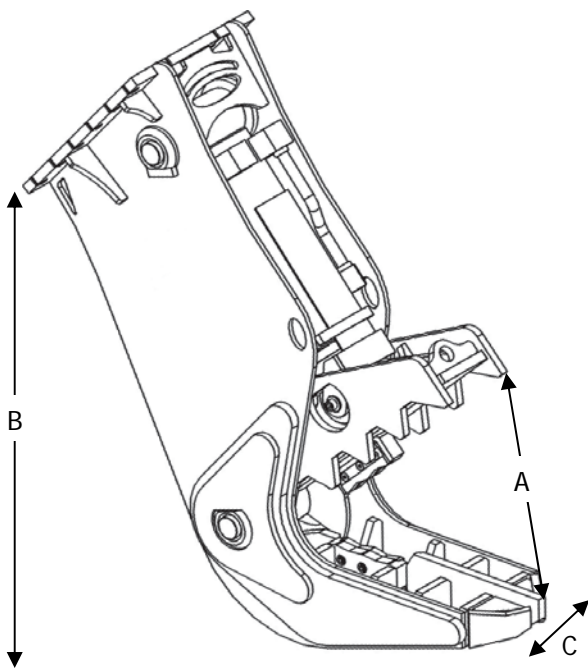

MODEL		F 07	F 12	F 18	F 20R	F25	F30
Machine Weight	[tonne]	5:12	13:18	18:28	18:28	25:30	28:40
Weight	[kg]	500	1200	1800	2300	2600	3300
Opening (A)	[mm]	450	650	800	800	865	950
Height (B)	[mm]	1320	1860	1920	2200	2300	2530
Jaw Width (C)	[mm]	330	410	530	530	530	580
Cylinder Force	[tonne]	55	95	125	125	150	175
End Point Force	[tonne]	30	55	70	70	80	95
Shear Force	[tonne]	65	100	110	110	130	150
Operating Pressure	[bar]	-	-	-	310	-	-
Flow (min)	[l/min]	-	-	-	170	-	-
Rotation Pressure	[bar]	-	-	-	140	-	-
Flow (max)	[l/min]	-	-	-	20	-	-

