


northerntrack

DEMOLITION ROCK RIPPERS

For quarry and demolition use the rock ripper permits maximum penetrative force and allows removal of stubborn materials under the most testing of working conditions. Rippers are equipped with replaceable ripper tips (not bucket teeth) and a range of front protectors can be fitted for extra protection under extreme usage. Mountings can be manufactured to suit standard excavator sizes or any quick-hitch attachment type as required.

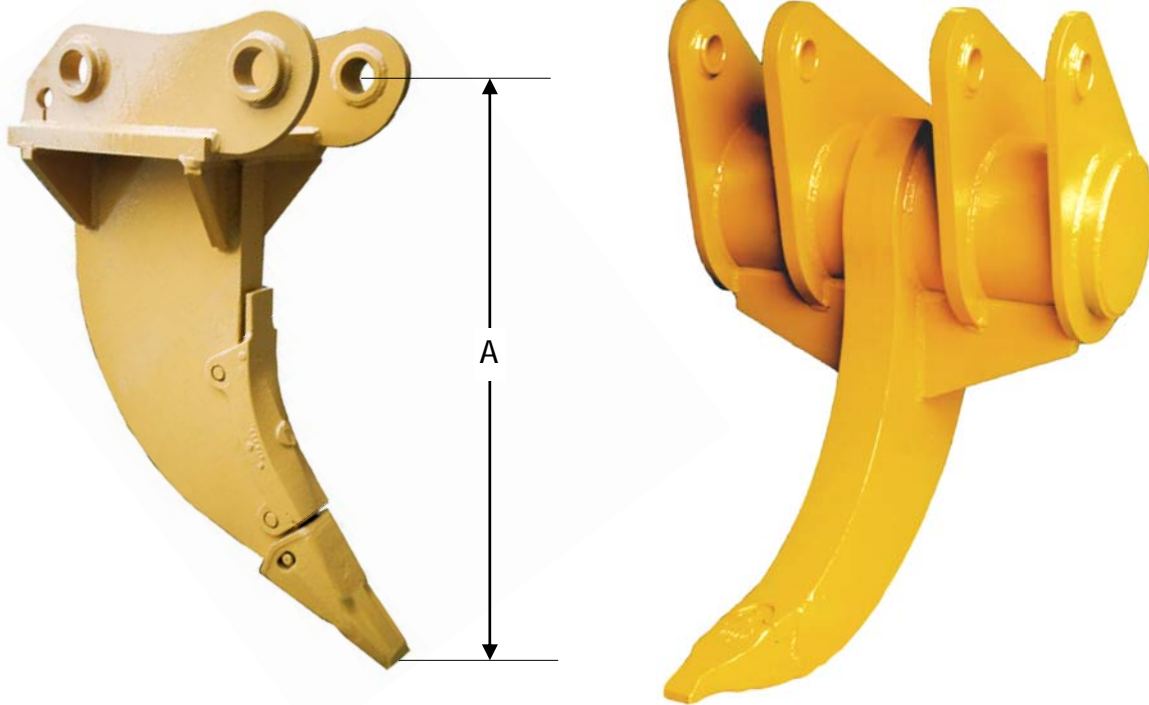

MODEL		RP10	RP15	RP20	RP35	RP45	RP60
Machine Weight	[tonne]	5:12	13:16	17:33	28:45	45:60	60:80
Tip Type		D4	D6	D8/9	D9/10	D11	ESCO
Shank Width	[mm]	50	60	75	90	120	160
Height (A)	[mm]	800	950	1200	1400	1750	1950

Specifications subject to modification at manufacturers discretion. All weights/sizes approximate. E&OE



Northerntrack Ltd
 Climax Works, Garnet Road
 Leeds LS11 5JD
 Tel: +44 (0)113-2762-300
 Fax: +44 (0)113-2762-400
 sales@northerntrack.co.uk
 www.northerntrack.co.uk